


OPEL CORSA
3/5 Puertas

Nº de homologación
Official approval number
Prüfung Nr.
Nº d'homologation

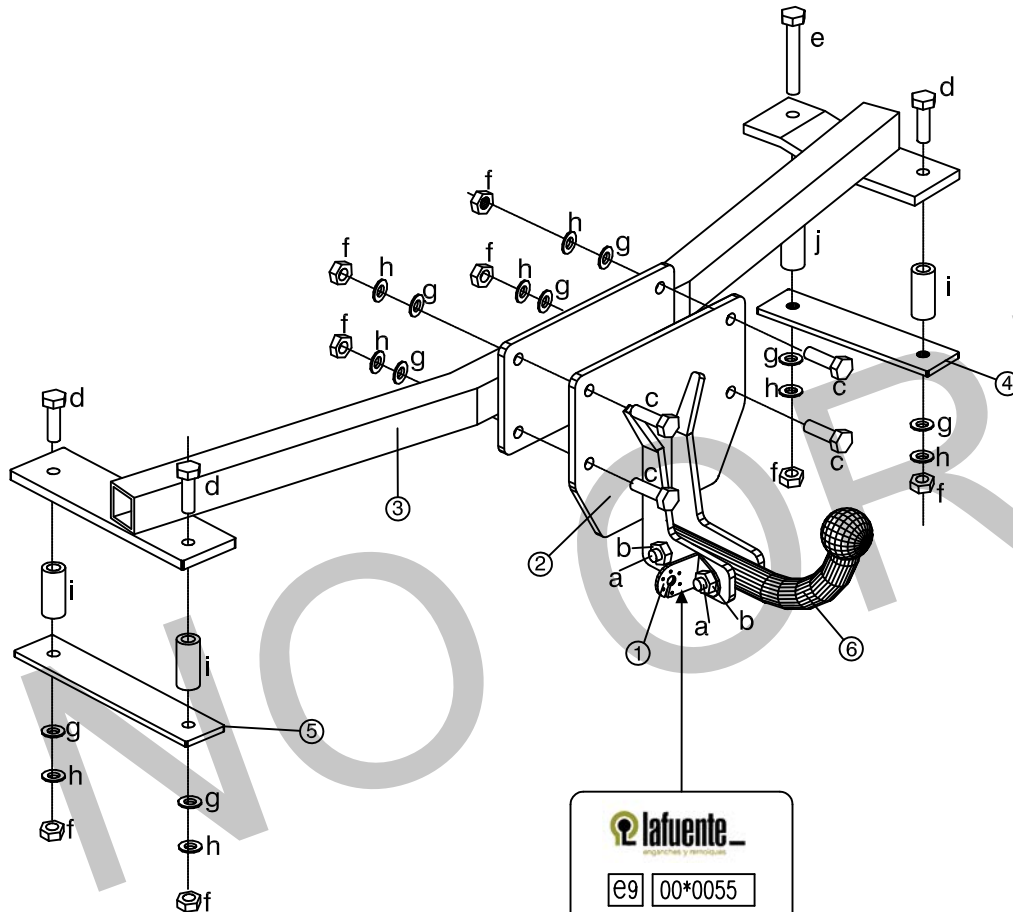

e9 00*0055


TIPO OC3P

CLASE A-50X


D 5,50 kN

S 75 kg

Made by LAFUENTE
(SPAIN)
Tlf. (+34) 952 625 840
www.lafuente.eu



950 kg.



75 kg.



5,50 kN

Par de apriete para los tornillos
Tightening torque for bolts
Schrauben Drehmoment
Couple de serrage pour vis

mm	6	8	10	12	14	16
Nm	10	25	55	85	135	200

Enganche homologado según Directiva 94/20 CE.
Hitch officially approved in accordance with Directive 94/20 CE.
Geprüfte Kupplung gemäß Kennzeichen 94/20 CE.
Crochet homologué selon la Directive 94/20 CE.

ELEMENTOS DE UNIÓN / CONNECTION COMPONENTS
DAZUGEHÖRENDE TEILEN / ÉLÉMENTS DE RACCORD

BOLA / BALL / KUGEL / BOULE

VEHÍCULO / VEHICLE
FAHRZEUG / VÉHICULE

a		2 x	M12x65 DIN 931	8.8	c		4 x	M10x40 DIN 933	8.8
b		2 x	M12 DIN 985	8	d		3 x	M10x90 DIN 933	8.8
					e		1 x	M10x100 DIN 933	8.8
					f		8 x	M10 DIN 985	8
					g		4 x	M10 DIN 125	-
					h		4 x	M10 DIN 6798	-
					i		3 x	Ø17 L=50mm	-
					j		1 x	Ø17 L=60mm	-

Este documento debe ser presentado en la I.T.V. junto con el certificado de montaje.
HNOS.SÁNCHEZ-LAFUENTE,S.A. no asume ningún tipo de responsabilidad por daños
causados por usos inadecuados.


Nº Rev: 01 Aprobado: 12-11-15



EE0017


OPEL CORSA

3 y 5 Puertas


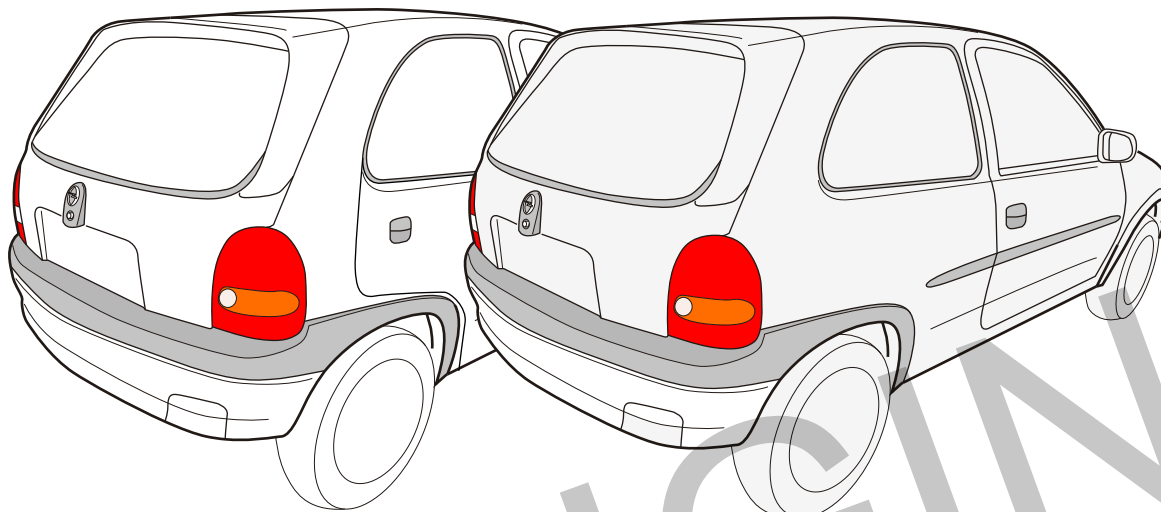


Instrucciones de montaje - Installation instructions - Notice de montage - Montage- og driftsvejledning

1

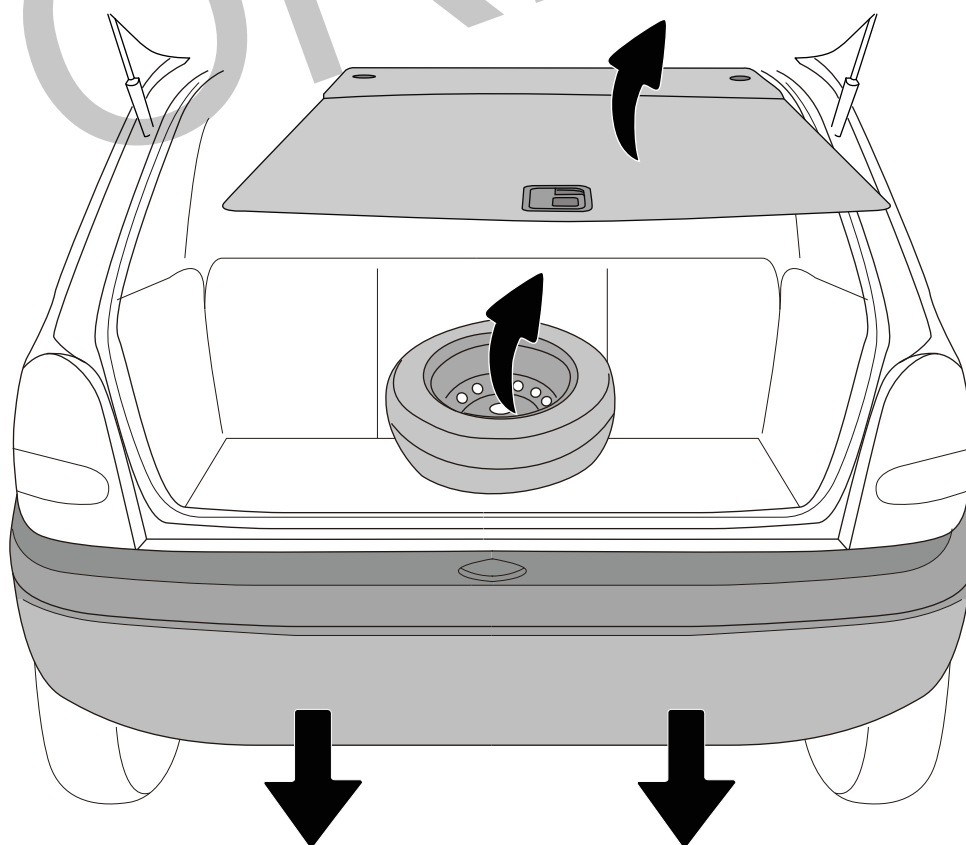


2

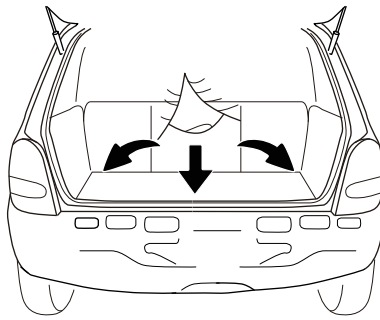



Buscar puntos de referencia
marcados por el fabricante.


Look for points, this are
marking by the manufacturer.

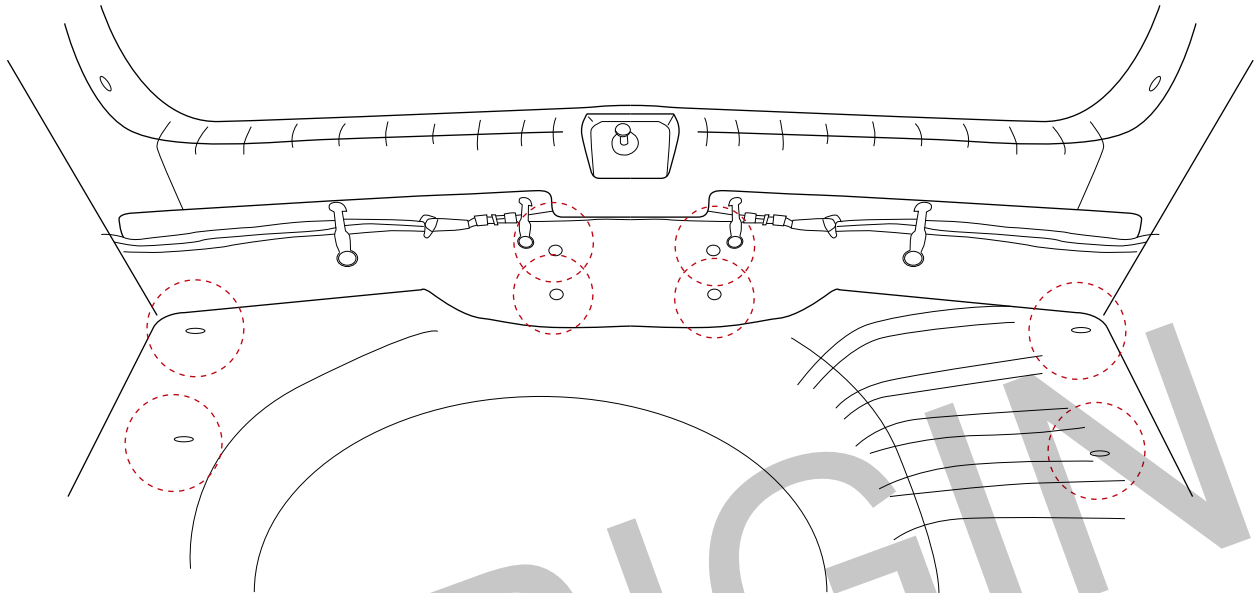

3

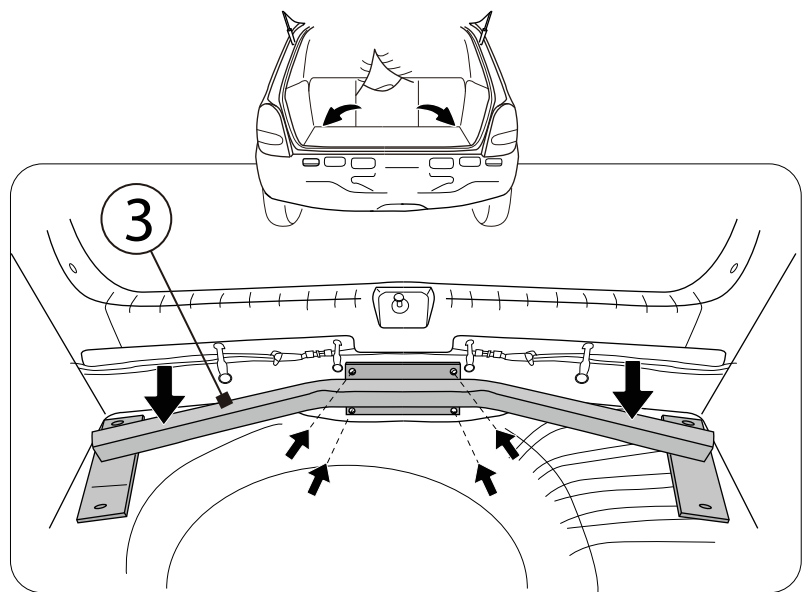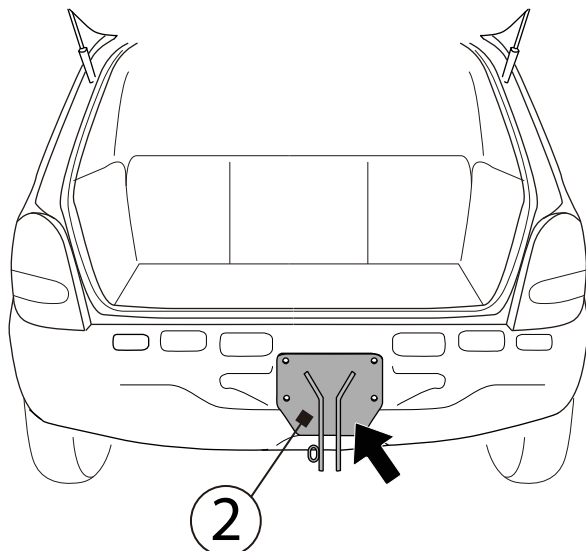

4

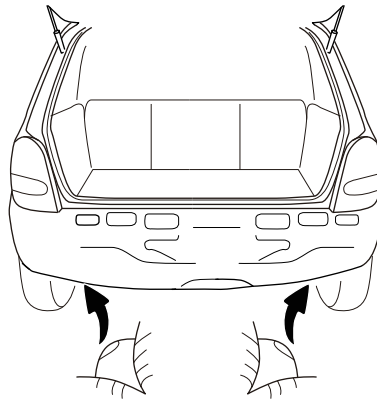

i




L=50mm



j



L=60mm

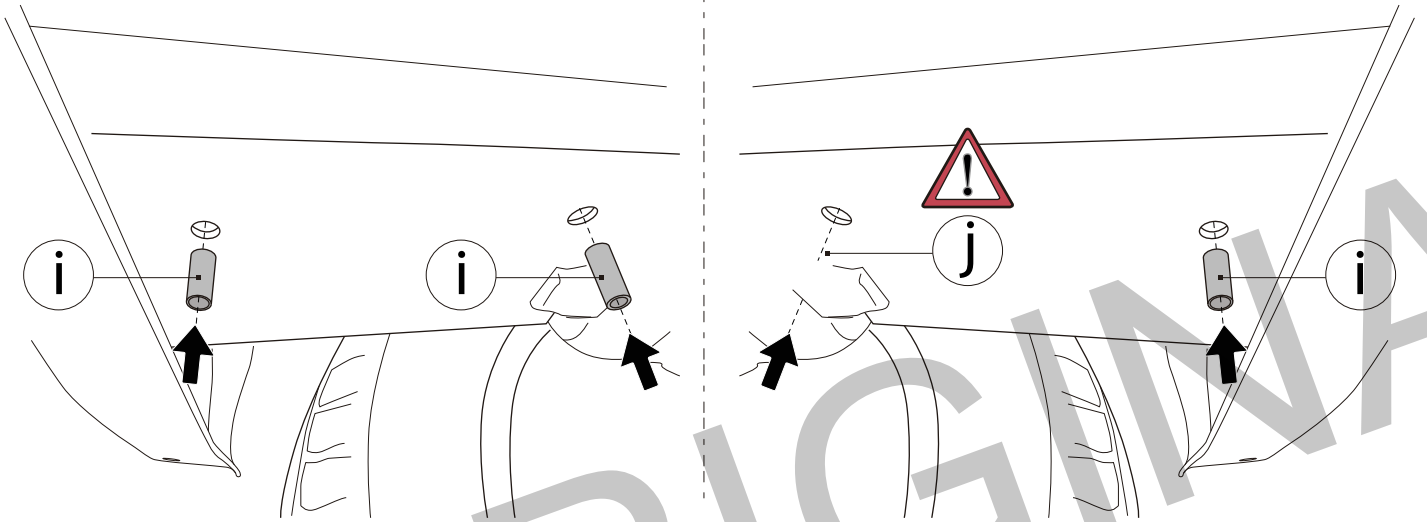

5

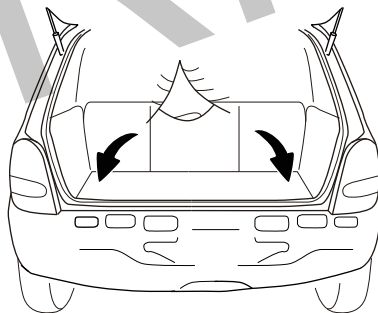


d



e









d

d

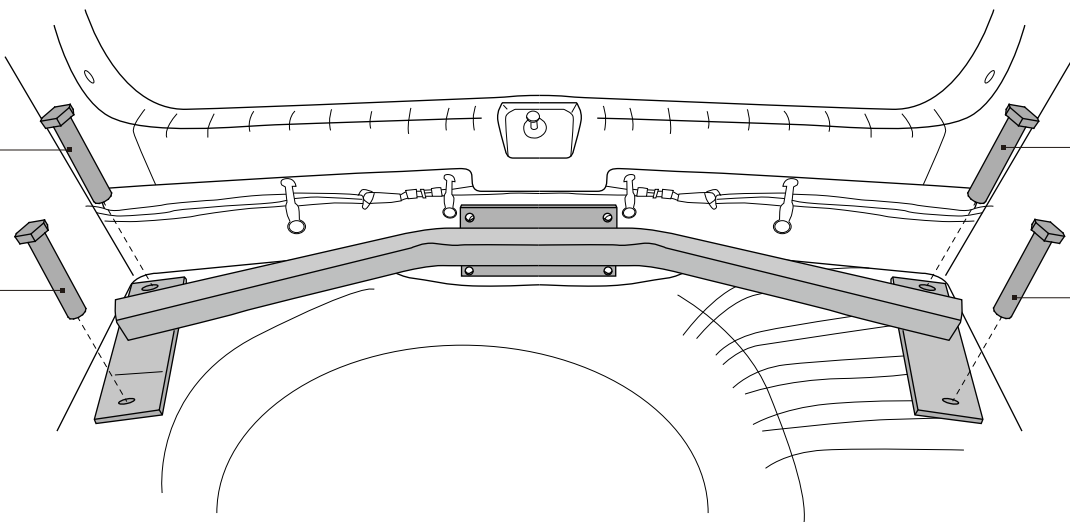

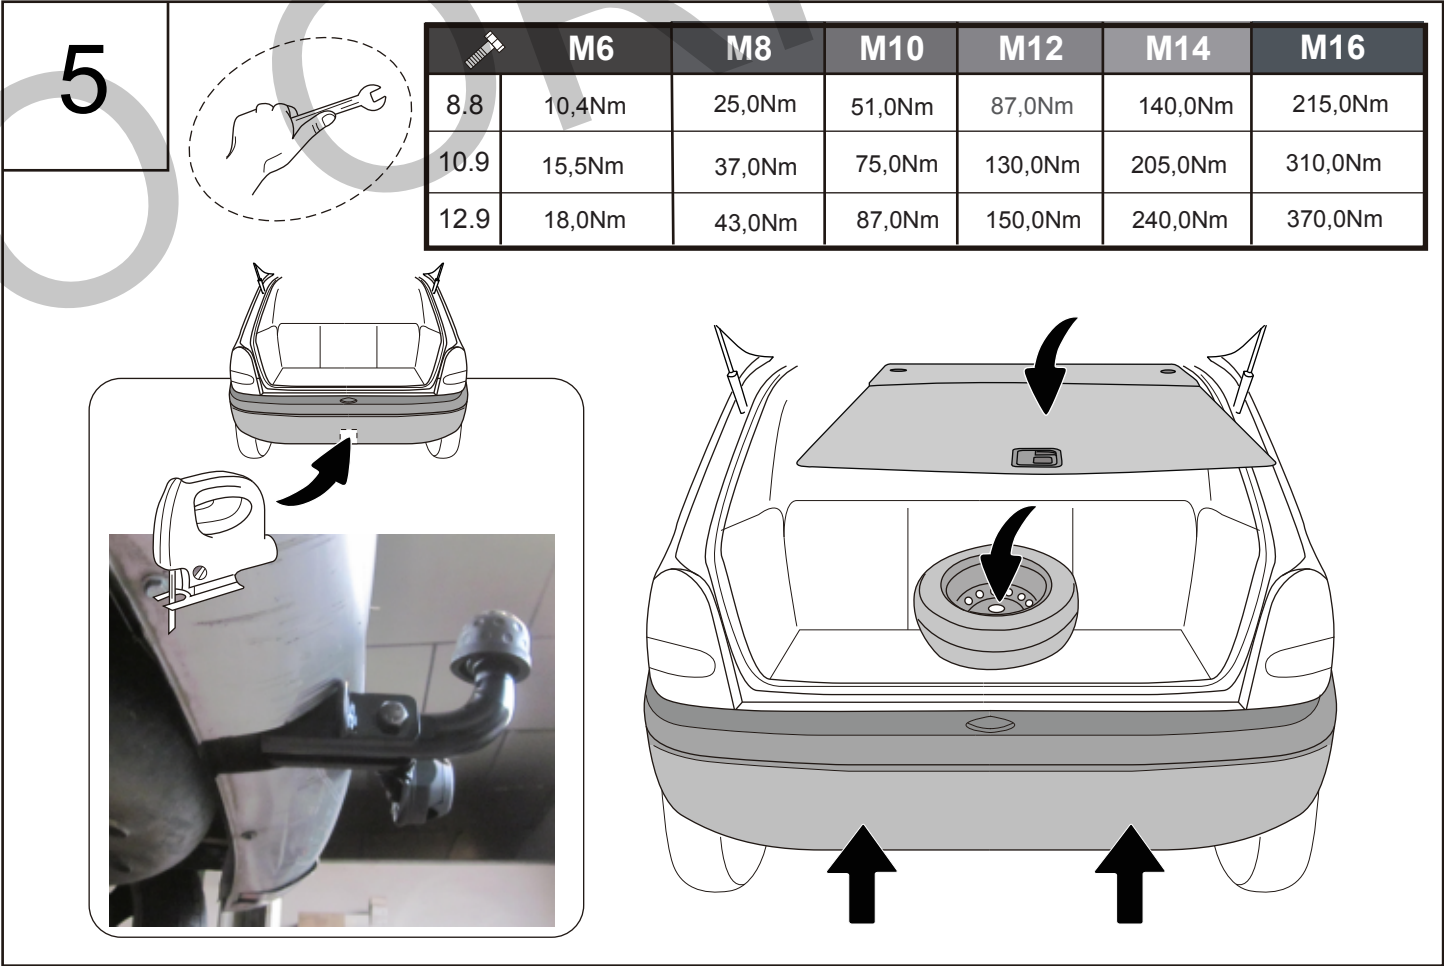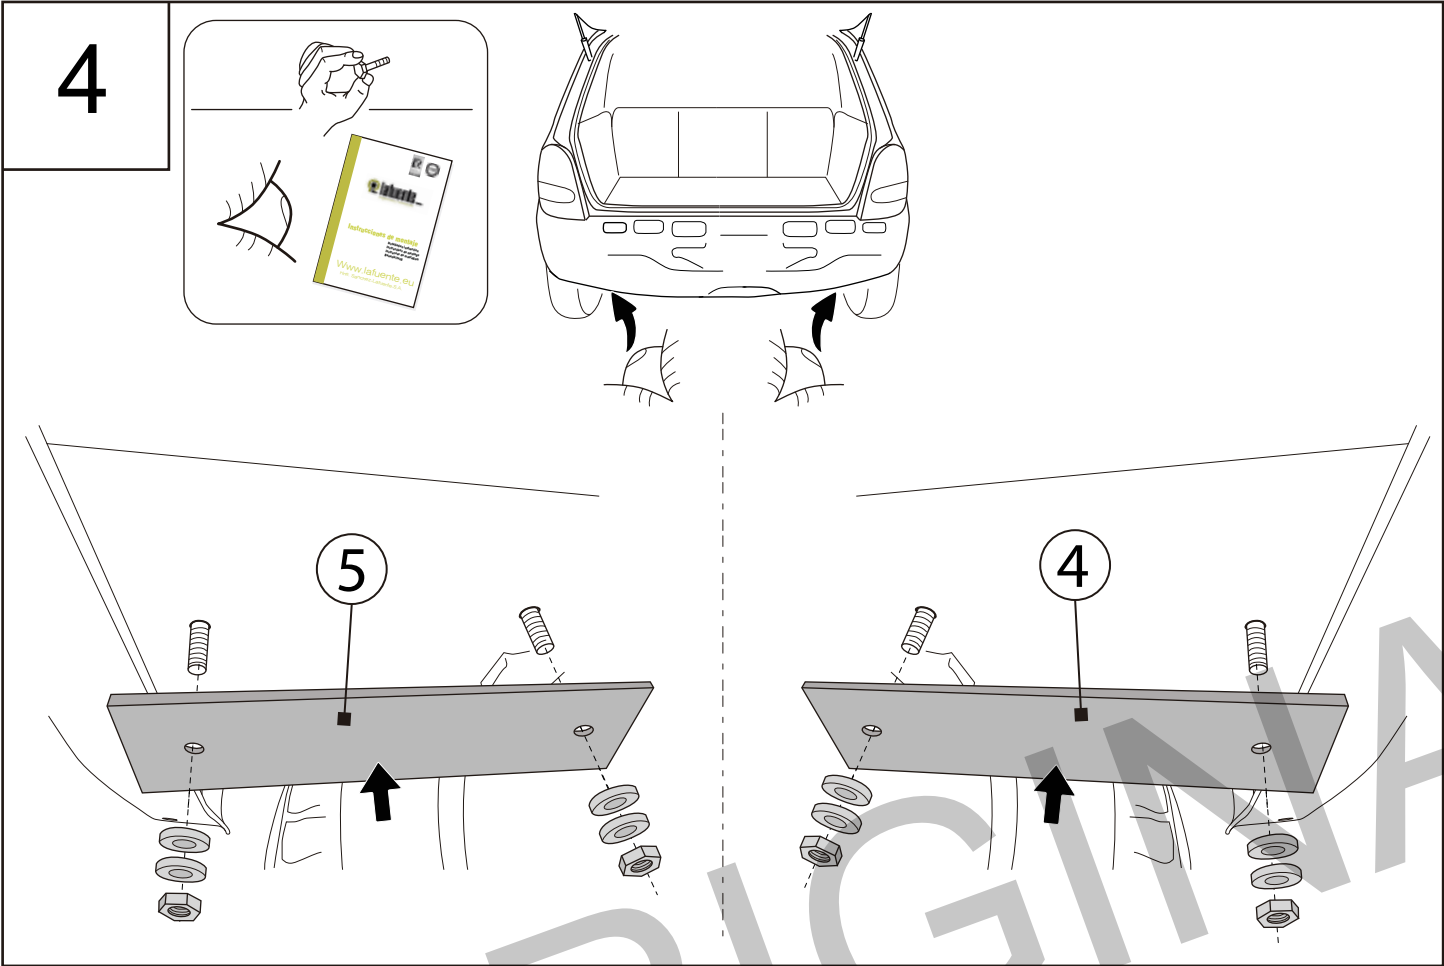

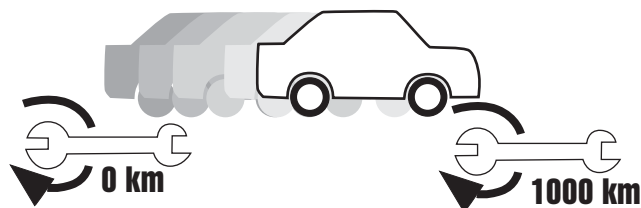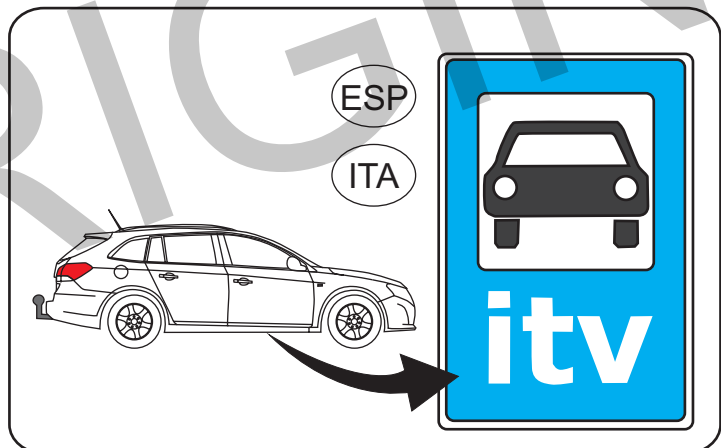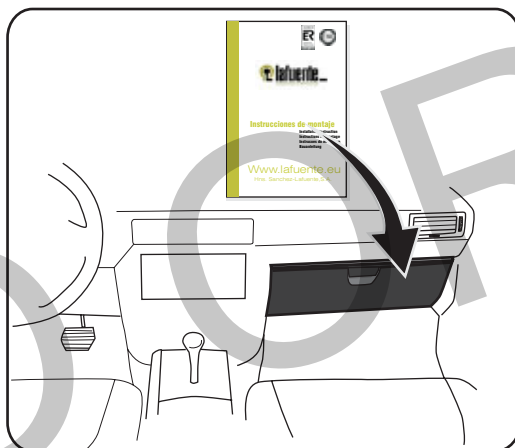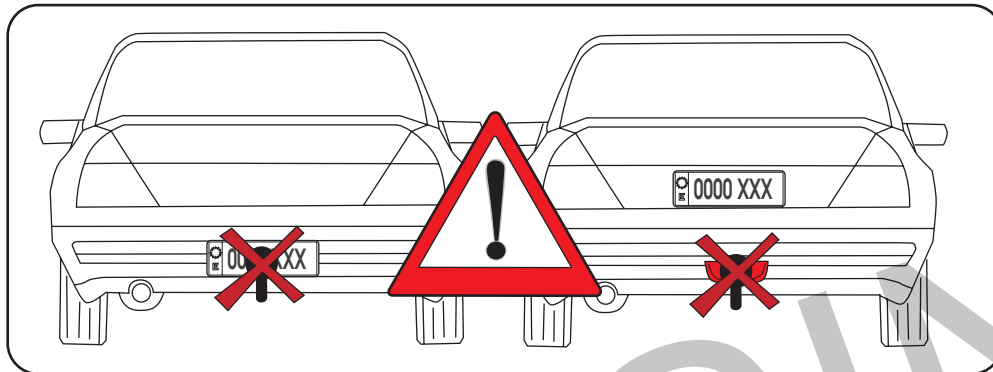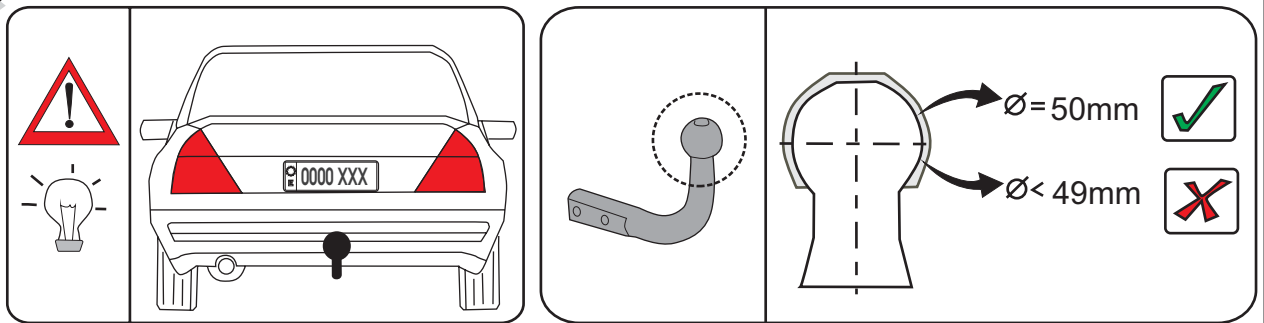

	M6	M8	M10	M12	M14	M16
8.8	10,4Nm	25,0Nm	51,0Nm	87,0Nm	140,0Nm	215,0Nm
10.9	15,5Nm	37,0Nm	75,0Nm	130,0Nm	205,0Nm	310,0Nm
12.9	18,0Nm	43,0Nm	87,0Nm	150,0Nm	240,0Nm	370,0Nm