





FORD EDGE

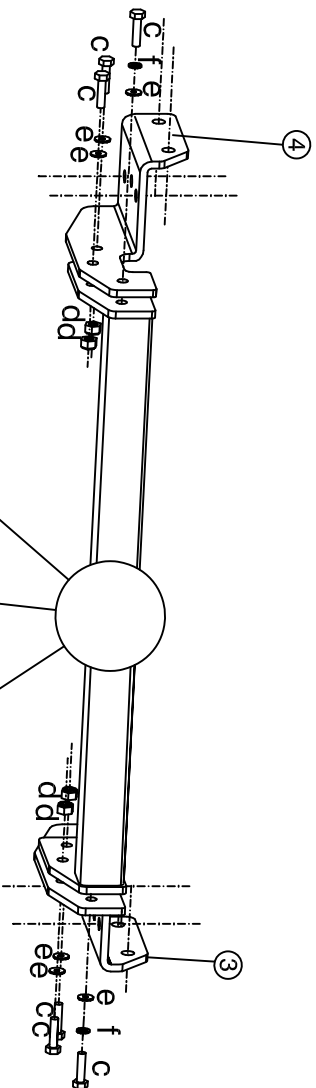

Made by LAFUENTE
(SPAIN)
☎ TEL. (+34) 952 625 840
www.lafuente.eu

E9 55R-01 2250

TIPO EEC496A D 11,89 kN
CLASE A-50X S 90 kg

Made by LAFUENTE
(SPAIN)
☎ TEL. (+34) 952 625 840
www.lafuente.eu

E9 55R-01 2251

TIPO EEC496A D 11,89 kN
CLASE A-50X S 90 kg

Made by LAFUENTE
(SPAIN)
☎ TEL. (+34) 952 625 840
www.lafuente.eu

E9 55R-01 2252

TIPO EEC496A D 11,89 kN
CLASE A-50X S 90 kg

M.M.R. 	S 	D
2.200 kg.	90 kg.	11,89 kN




ELEMENTOS DE UNIÓN / CONNECTION COMPONENTS DAZUGEHÖRENDEN TEILEN / ÉLÉMENTS DE RACCORD				VEHÍCULO / VEHICLE FAHRZEUG / VÉHICULE			
BOLA / BALL / KUGEL / BOULE				VEHÍCULO / VEHICLE FAHRZEUG / VÉHICULE			
a 	2 x	M12x65 DIN 931	8,8	c 	6 x	M12x40 DIN 933	8,8
b 	2 x	M12 DIN 985	8	d 	4 x	M12 DIN 985	8
				e 	6 x	M12 DIN 125	-
				f 	4 x	M12 DIN 6798	-
a 	4 x	M12x25 DIN 933	8,8	w 	1 x	M10x30 DIN 933	8,8
b 	4 x	M12 DIN 127	-	x 	1 x	M10 DIN 985	8
				y 	2 x	M10 DIN 125	-
a 	4 x	M12x 25 DIN 933	8,8	z 	1 x	M10 DIN 2093	-
b 	4 x	M12 DIN 127	-				

Par de apriete para los tornillos/Tightening torque for bolts/Schrauben Drehmoment/Couple de serrage pour vis											
Und.Nm	M6	M8	M10	M12	M14	M16					
calidad	1	1,25	1,5	1,25	1,75	1,5	1,25	1,5	1,75	1,5	2
8,8	11,3	27,3	54,0	57,0	93,0	97,0	101,0	148,0	159,0	230,0	
10,9	16,5	40,1	79,0	83,0	137,0	143,0	149,0	218,0	234,0	320,0	
12,9	19,3	46,9	93,0	98,0	160,0	167,0	174,0	255,0	274,0	395,0	

Este documento debe ser presentado en la I.T.V. junto con el certificado de montaje.
HNOS.SANCHEZ-LAFUENTE,S.A. no asume ningún tipo de responsabilidad por
daños causados por usos inadecuados.




FORD EDGE




EE0496A



EE1496A




EE4496A





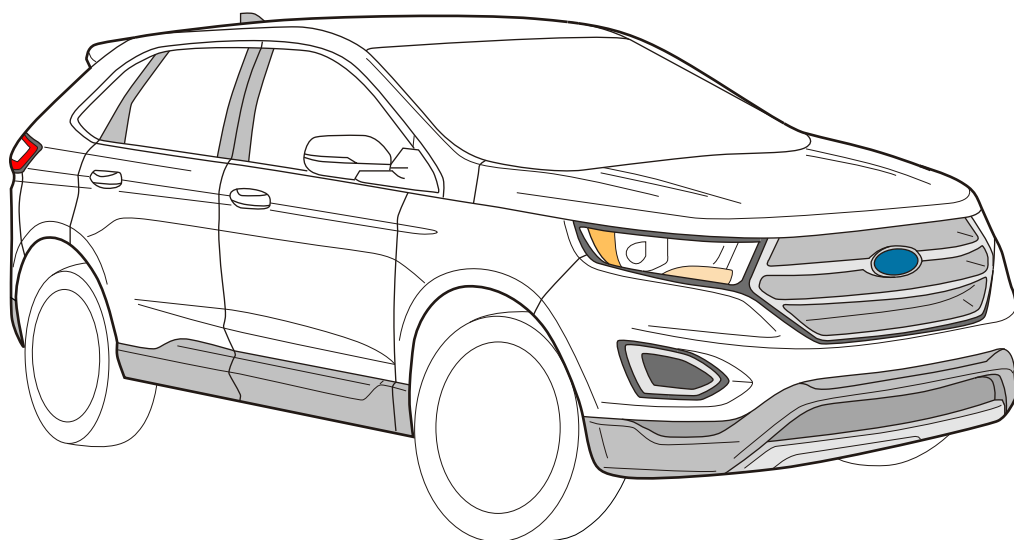


Instrucciones de montaje - Installation instructions - Notice de montage - Montage- og driftsvejledning





1


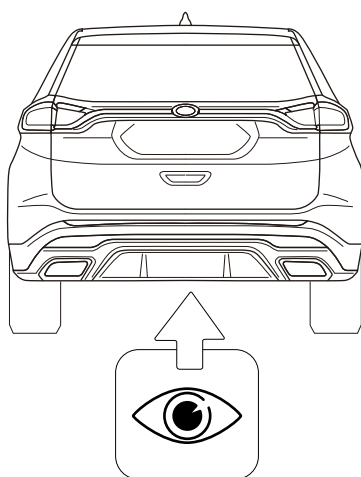


2

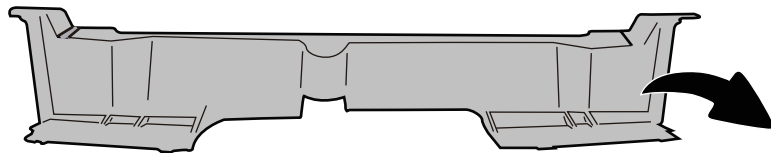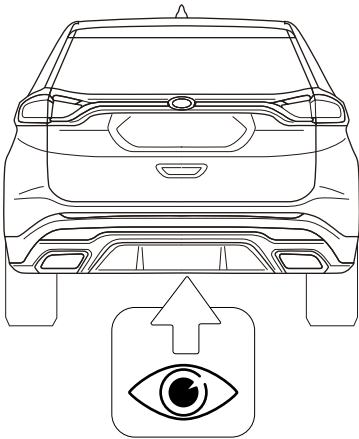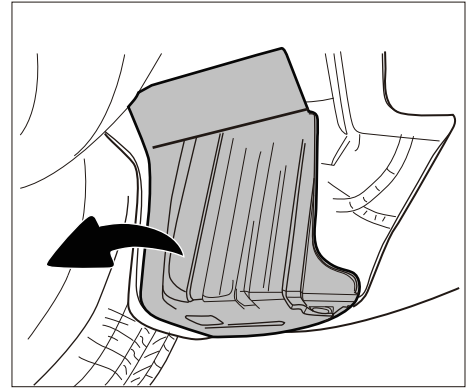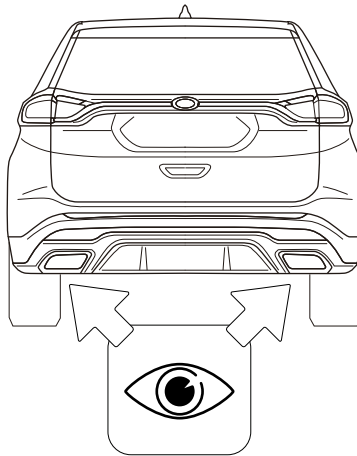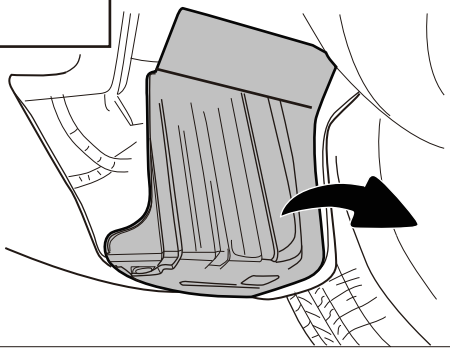


3








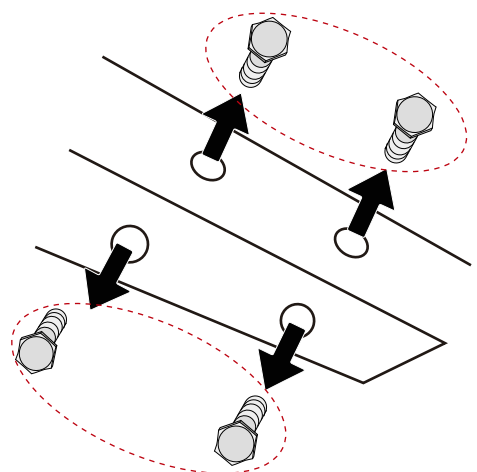

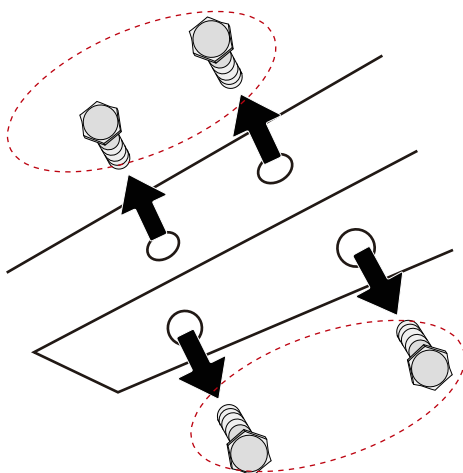
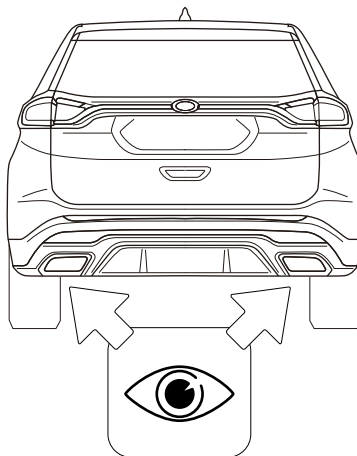


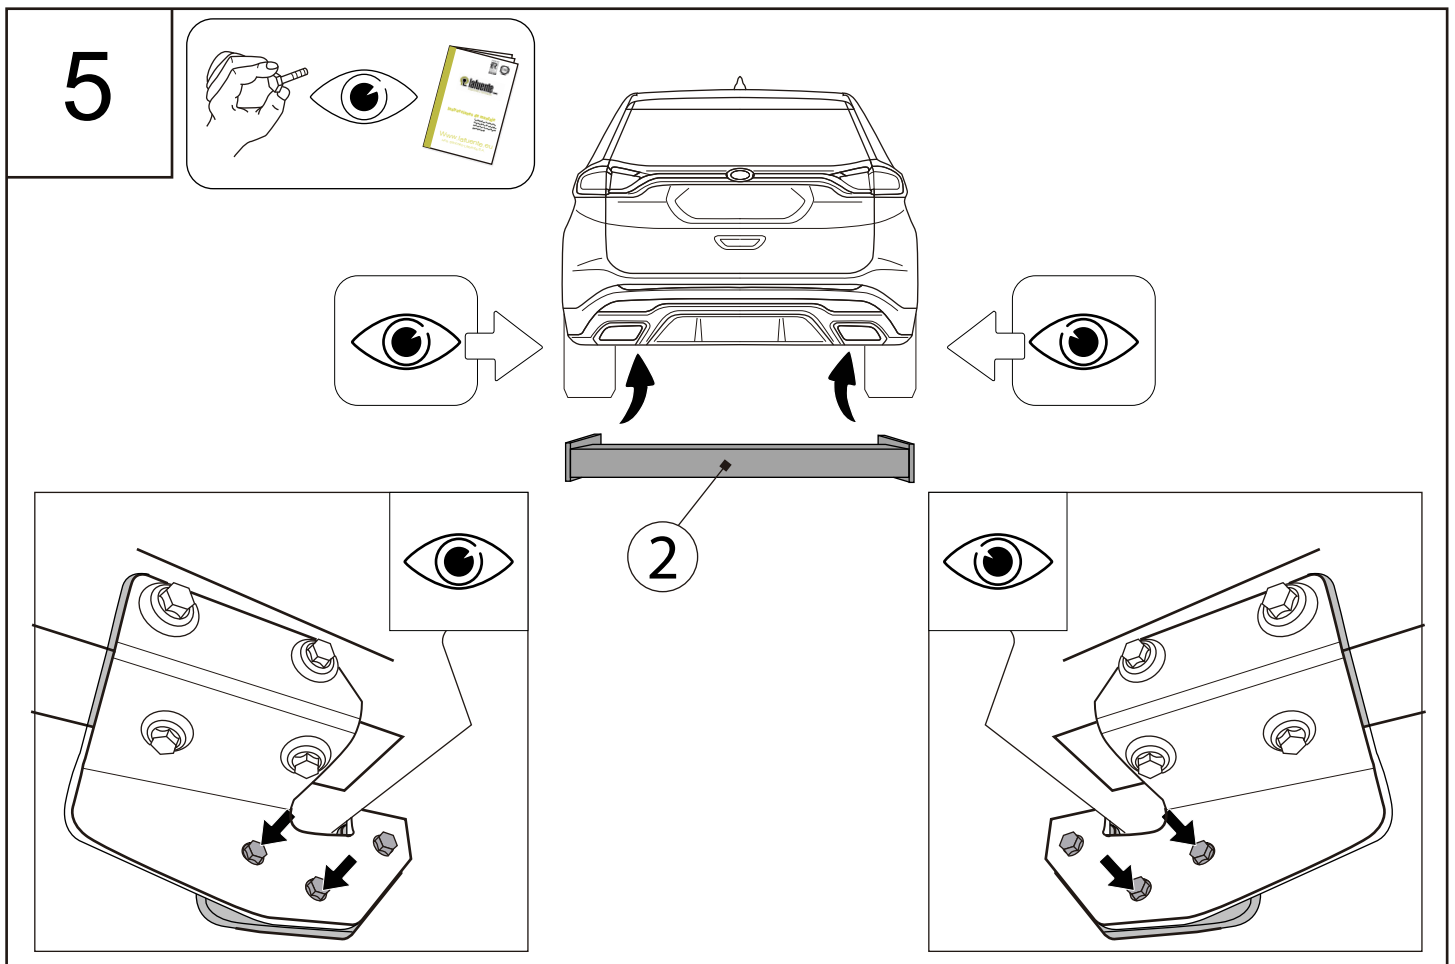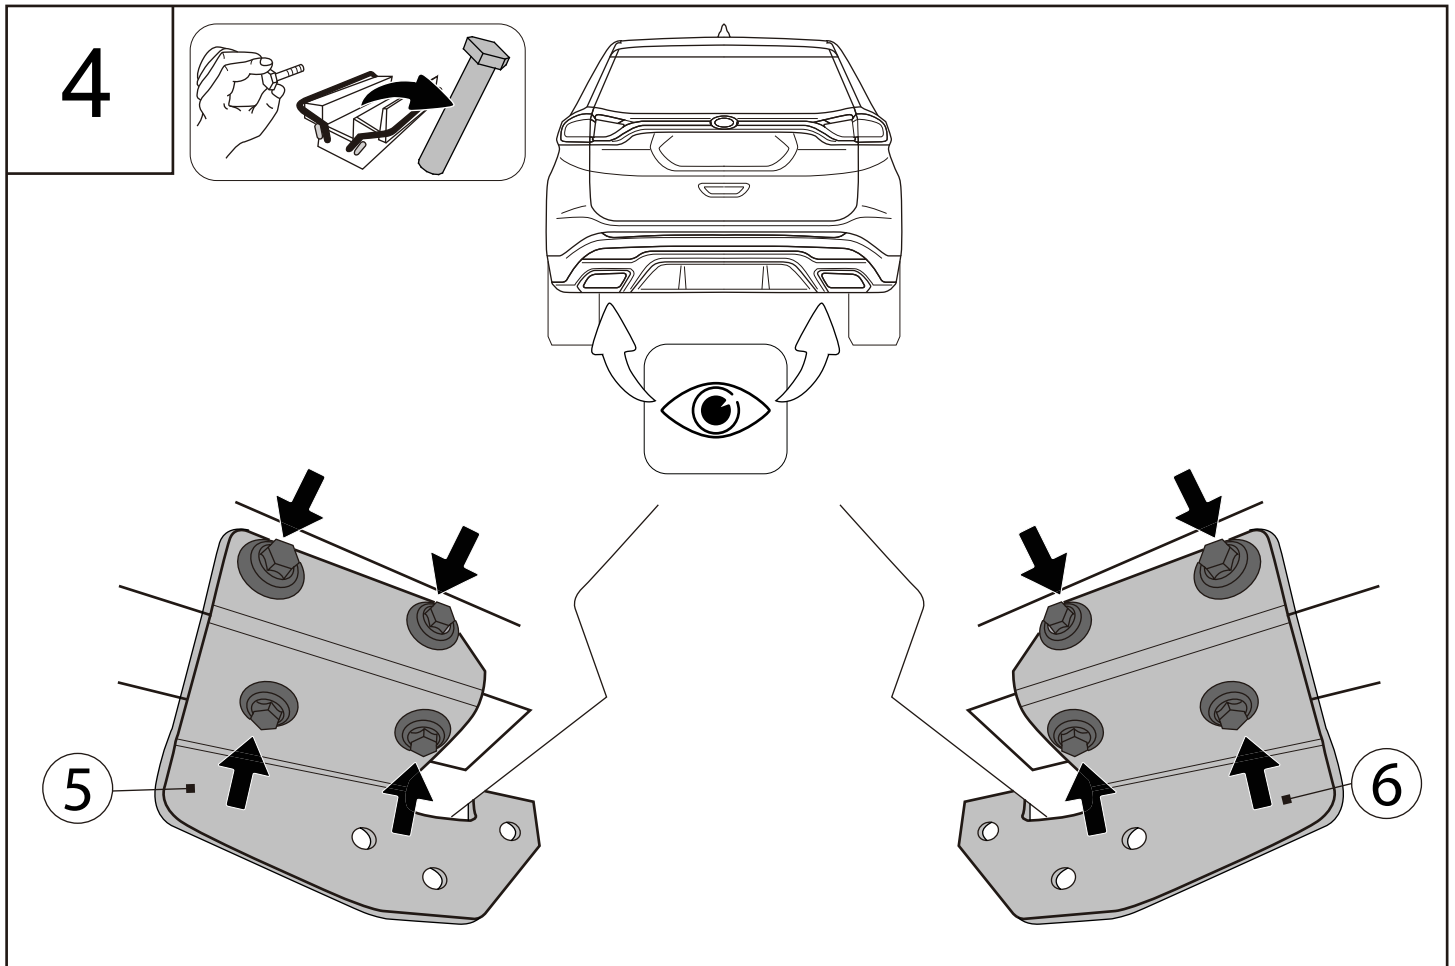

6



	M6	M8	M10	M12	M14	M16
8.8	10,4Nm	25,0Nm	51,0Nm	87,0Nm	140,0Nm	215,0Nm
10.9	15,5Nm	37,0Nm	75,0Nm	130,0Nm	205,0Nm	310,0Nm
12.9	18,0Nm	43,0Nm	87,0Nm	150,0Nm	240,0Nm	370,0Nm

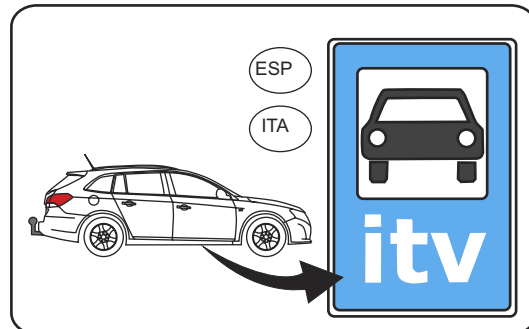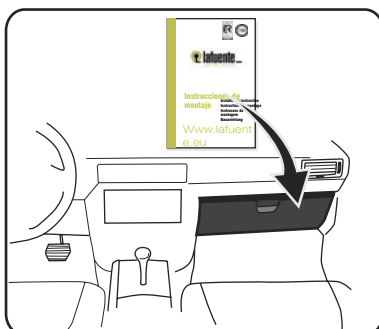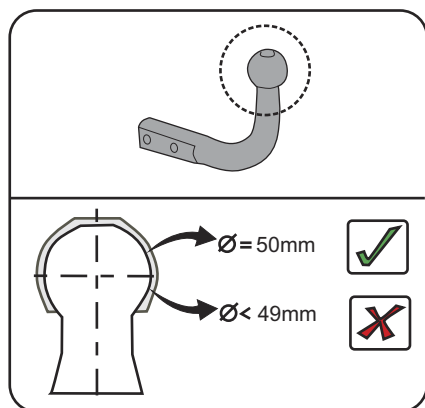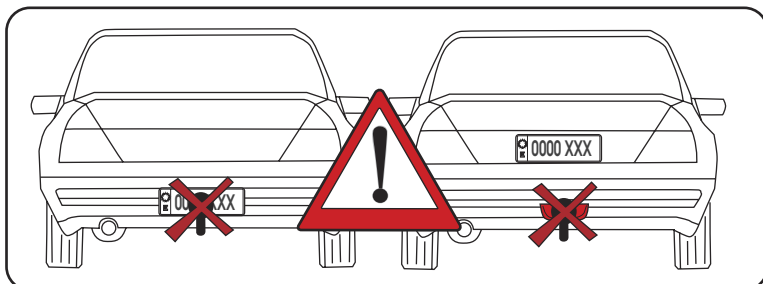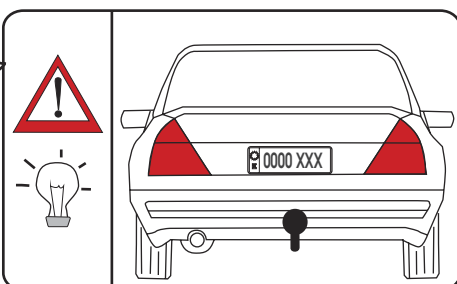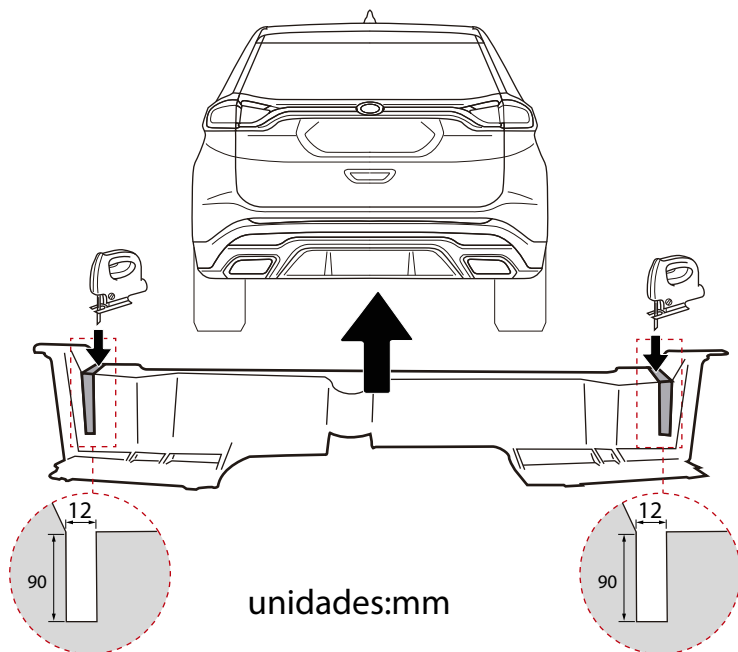

	M6	M8	M10	M12	M14	M16
8.8	10,4Nm	25,0Nm	51,0Nm	87,0Nm	140,0Nm	215,0Nm
10.9	15,5Nm	37,0Nm	75,0Nm	130,0Nm	205,0Nm	310,0Nm
12.9	18,0Nm	43,0Nm	87,0Nm	150,0Nm	240,0Nm	370,0Nm