






**DACIA
LOGAN II
SANDERO II
SANDERO STEPWAY II**

Nº de homologación
Official approval number
Prüfung Nr.
Nº d'homologation

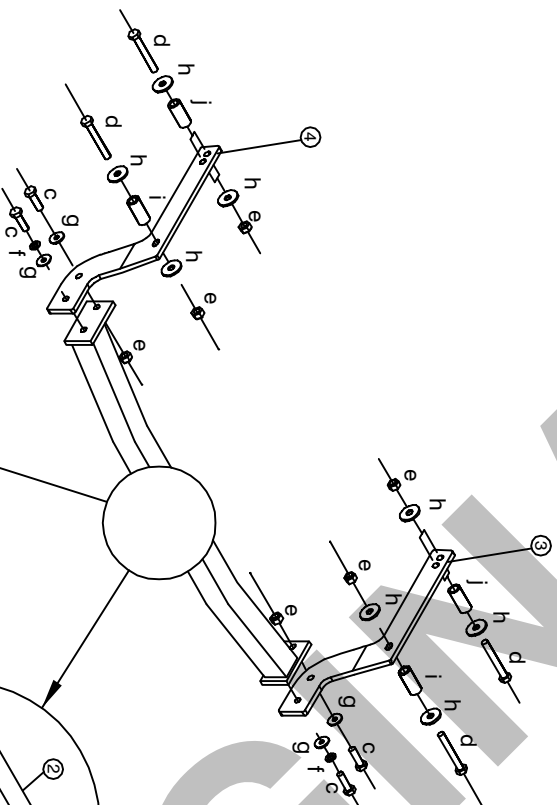

M.M.R.	S	D
1.200 kg.	75 kg.	6,84 kN

Par de apriete para los tornillos Tightening torque for bolts Schrauben Drehmoment Couple de serrage pour vis	mm	6	8	10	12	14	16
	Nm	10	25	55	85	135	200


Enganche homologado según Reglamento nº 55 CEPE
Hitch officially approved in accordance with Regulation nº 55 CEPE
Geprüfte Kupplung gemäß • Règlement nº 55 CEPE
Crochet homologué selon la Réglementation nº 55 CEPE

ELEMENTOS DE UNIÓN / CONNECTION COMPONENTS DAZUGEHÖRENDEN TEILEN / ÉLÉMENTS DE RACCORD		VEHÍCULO / VEHICLE FAHRZEUG / VÉHICULE	
BOLA / BALL / BOULE			
a	2 x M12x65 DIN 931	8,8	c 4 x M10x40 DIN 931 8,8
b	2 x M12 DIN 985	8	d 4 x M10x90 DIN 931 8,8
			e 6 x M10 DIN 985 8
			f 2 x M10 DIN 127 -
			g 4 x M10 DIN 125 -
			h 8 x M12 DIN 9021 -
a	4 x M12x25 DIN 933	8,8	i 2 x CASQUILLO Ø21 L50 -
b	4 x M12 DIN 125	-	j 2 x CASQUILLO Ø21 L55 -


Este documento debe ser presentado en la I.T.V. junto con el certificado de montaje.
HINOS.SÁNCHEZ-LAFUENTE.S.A. no asume ningún tipo de responsabilidad por daños causados por usos inadecuados.



EE0452



EE1452

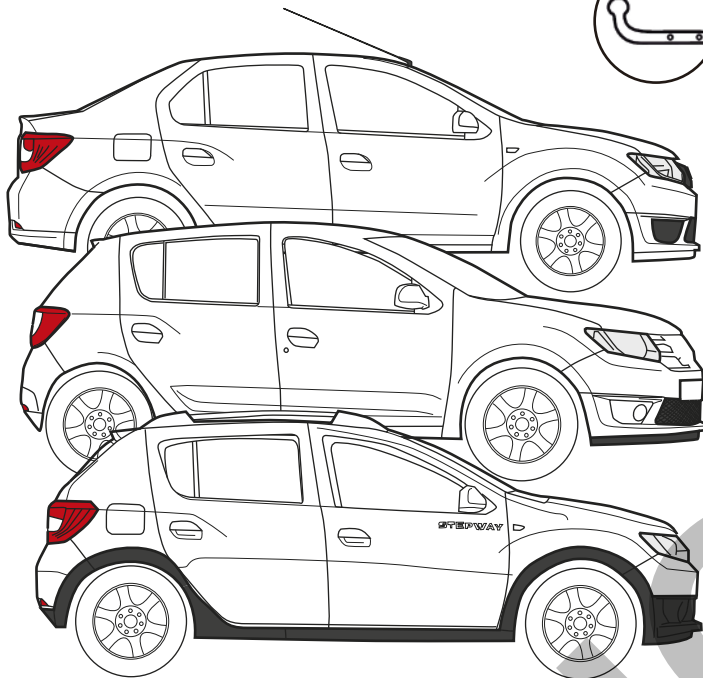

DACIA LOGAN

DACIA SANDERO

**DACIA SANDERO
STEPWAY**

Instrucciones de montaje - Installation instructions - Notice de montage - Montage- og driftsvejledning

1


DACIA LOGAN





DACIA SANDERO





**DACIA SANDERO
STEPWAY**

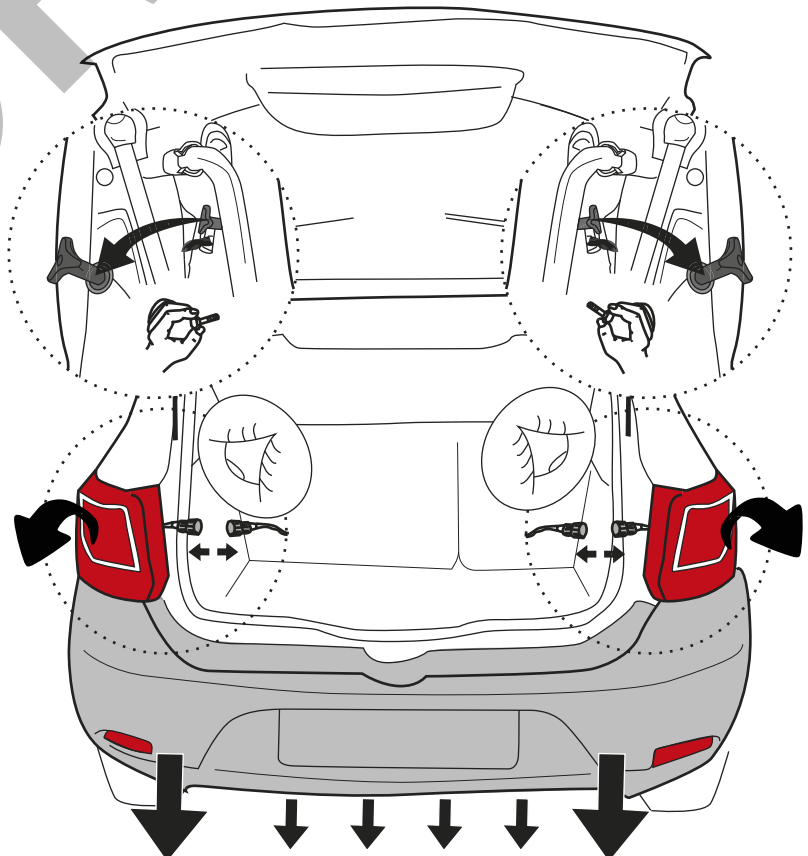

2


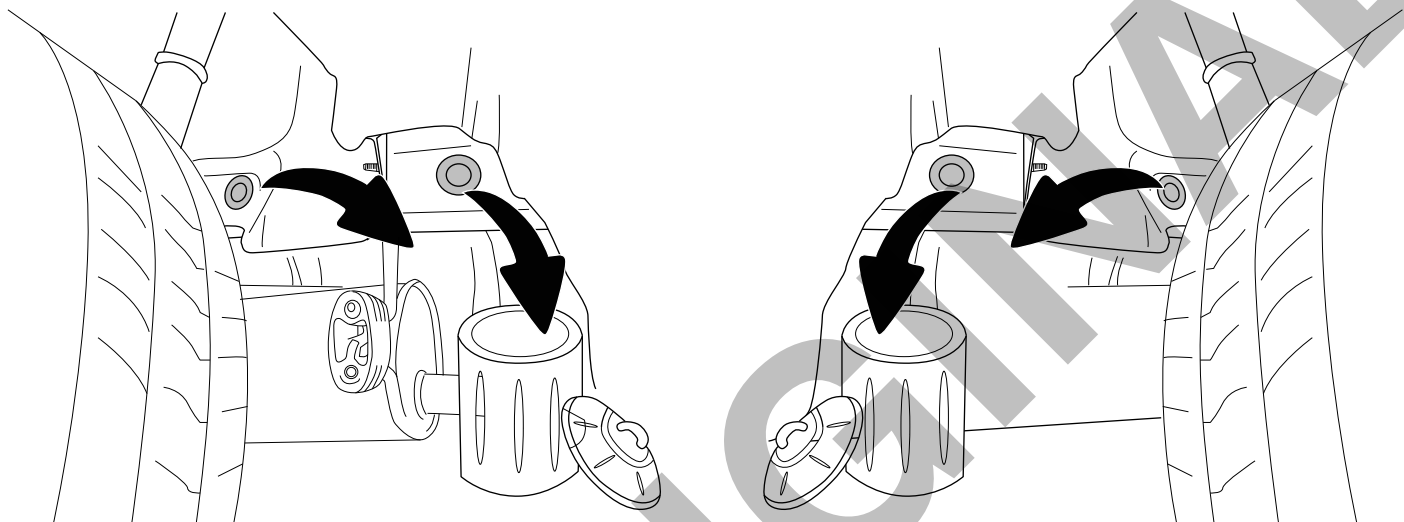
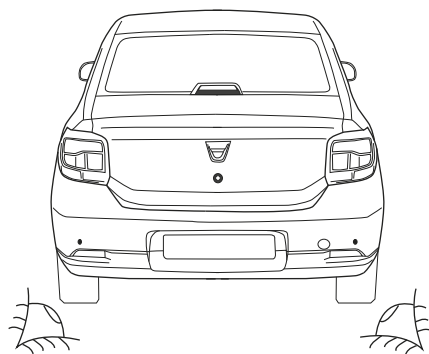




3

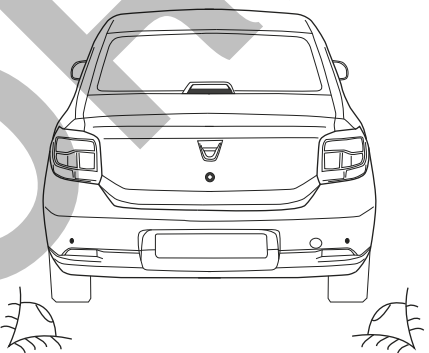


j L 55mm

i L 50mm



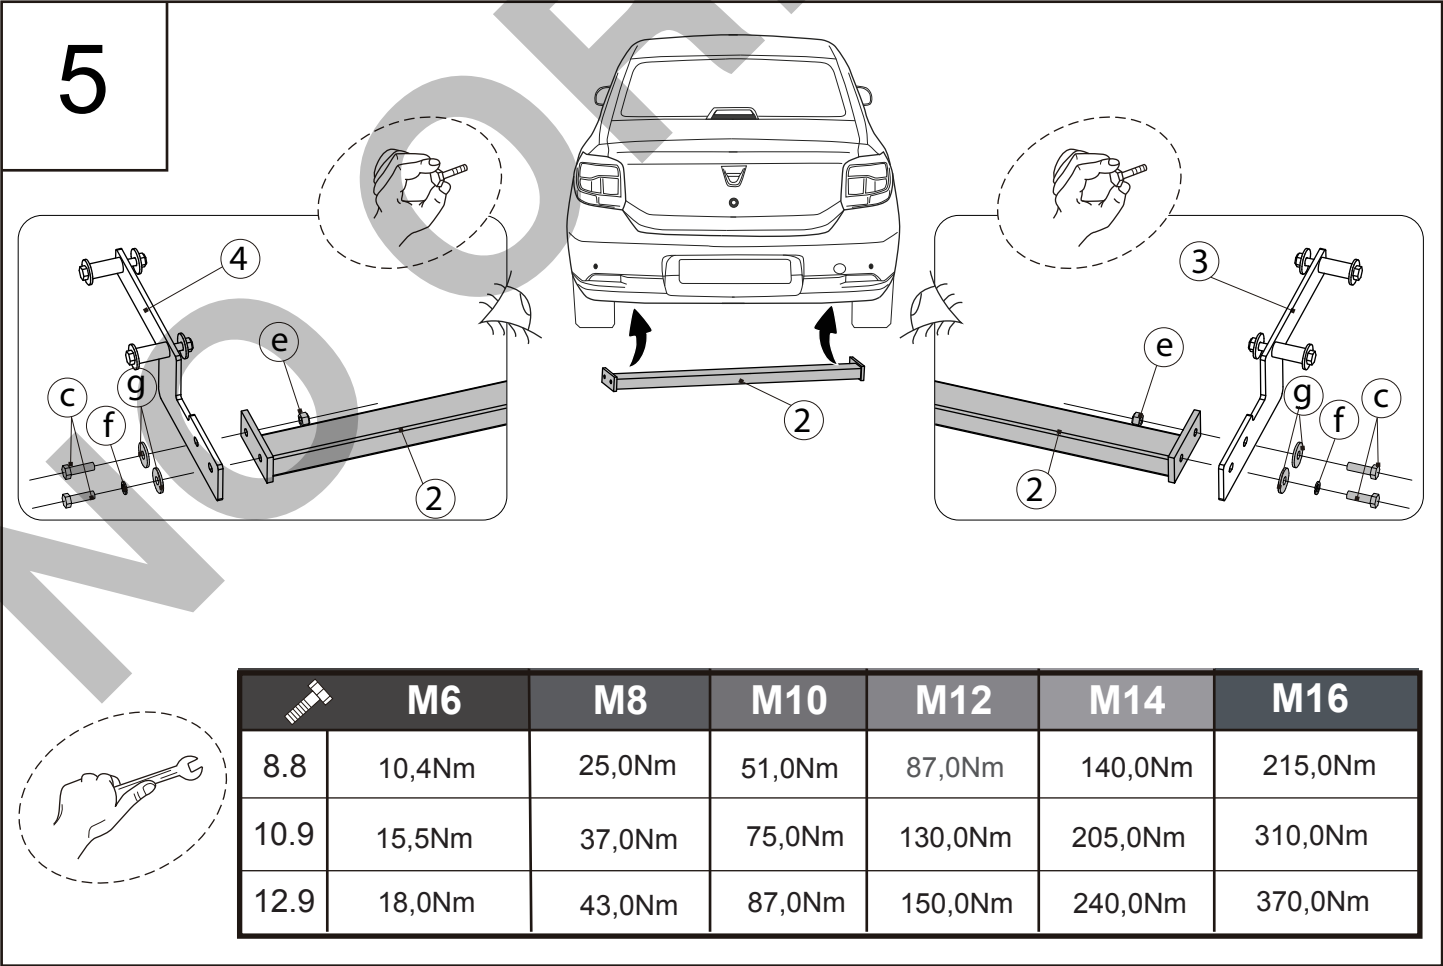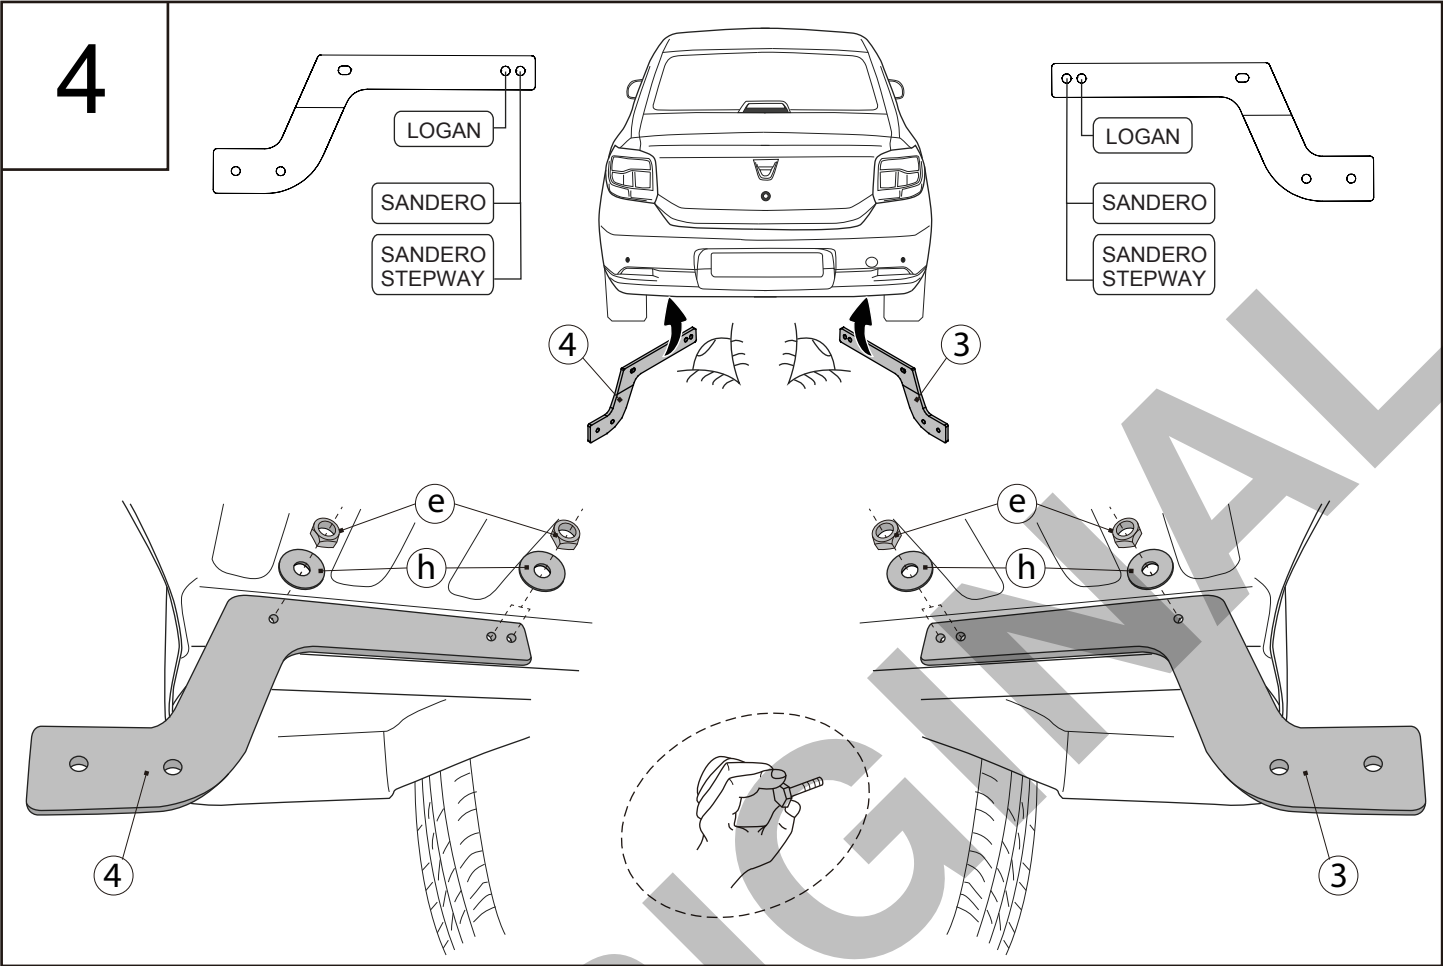

6

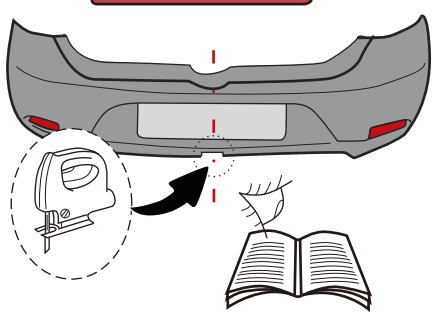









DACIA LOGAN



DACIA SANDERO



DACIA SANDERO
STEPWAY

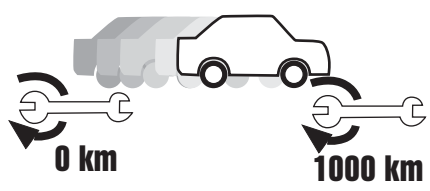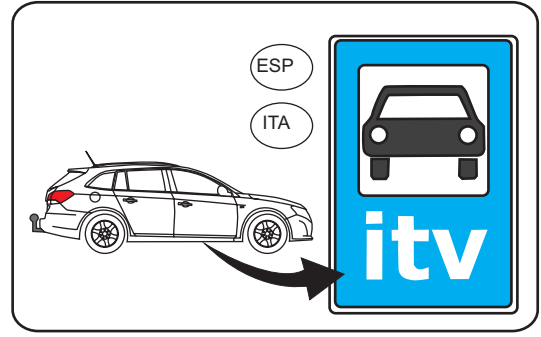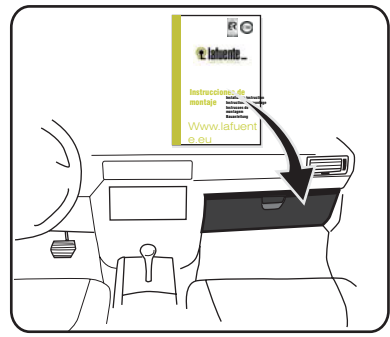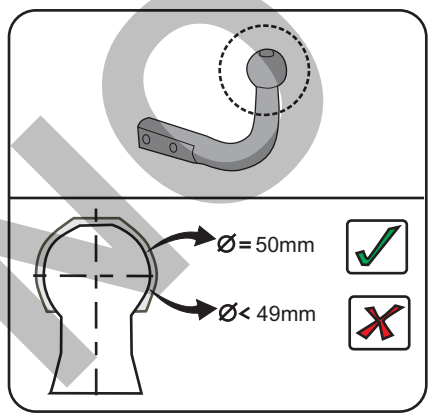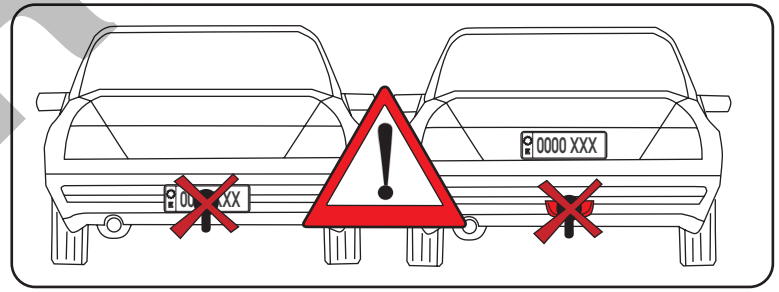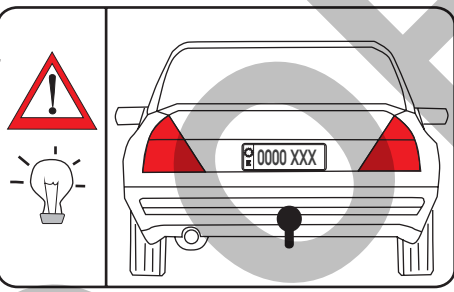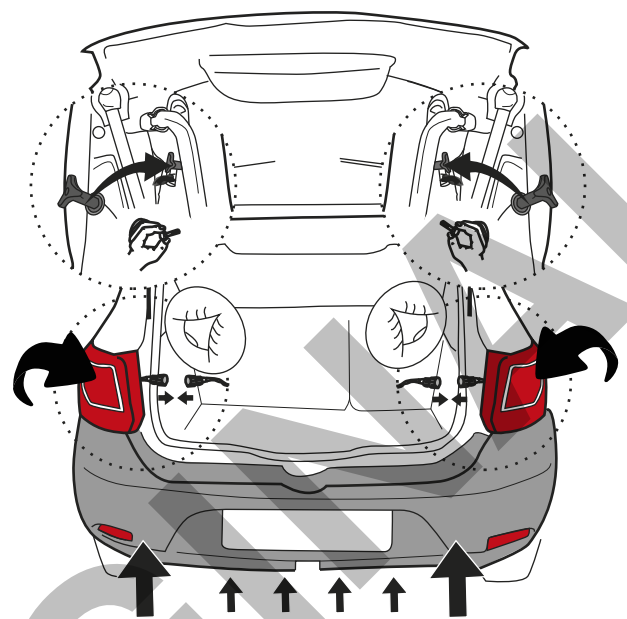

	M6	M8	M10	M12	M14	M16
8.8	10,4Nm	25,0Nm	51,0Nm	87,0Nm	140,0Nm	215,0Nm
10.9	15,5Nm	37,0Nm	75,0Nm	130,0Nm	205,0Nm	310,0Nm
12.9	18,0Nm	43,0Nm	87,0Nm	150,0Nm	240,0Nm	370,0Nm